



Scan for full manual

## VIA Connect PLUS Quick Start Guide For Installer




This guide helps you install and configure your **VIA Connect PLUS** for the first time.

Go to [www.kramerav.com/downloads/VIA Connect PLUS](http://www.kramerav.com/downloads/VIA_Connect_PLUS) to download the latest user manual and check if firmware upgrades are available.

### Step 1: Check what's in the box

- ✓ VIA Connect PLUS Collaboration Device
- ✓ HDMI cable extender (M to F)
- ✓ 1 Wall mounting kit
- ✓ 1 Power adapter (19V DC)
- ✓ 1 Quick start guide

### Step 2: Get to know your VIA Connect PLUS

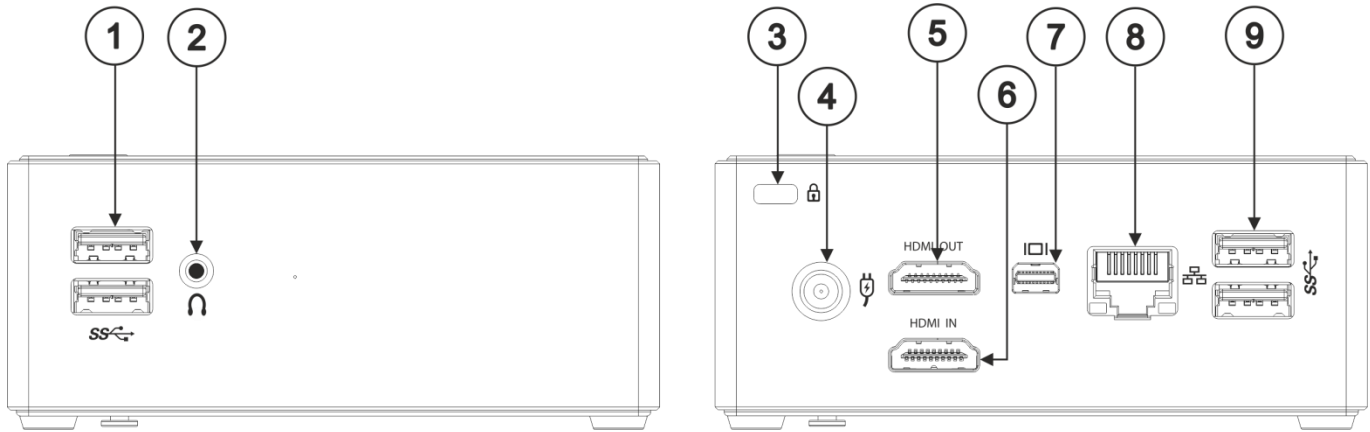

#	Feature	Function
1	USB 3.0 Connectors	Connect to up to two USB devices.
2	Audio Output 3.5mm Mini Jack	Connect to earphones or powered speakers.
3	Security Slot	Connect to a security lock cable.
4	Power Connector	Connect to the 19V DC power adapter.
5	HDMI OUT Connector	Connect to an HDMI acceptor.
6	HDMI IN Connector	Connect to an HDMI source (for example, a laptop).
7	Mini DisplayPort Connector	Connect to a Mini DisplayPort acceptor.
8	LAN RJ-45 Connector	Connect to a LAN network or to a wireless router.
9	USB 3.0 Connectors	Connect to up to two USB devices.


### Step 3: Install VIA Connect PLUS

Install **VIA Connect PLUS** using one of the following methods:

- Install the mounting plate on a wall with the 4 screws, insert the 2 hand-tightened screws into the bottom of the device, and mount the device on the mounting plate using the 2 screws.
- Place the device on a flat surface.

## Step 4: Connect the inputs and outputs

Always switch OFF the power on each device before connecting it to your **VIA Connect PLUS**. For best results, we recommend that you always use Kramer high-performance cables to connect AV equipment to **VIA Connect PLUS**.

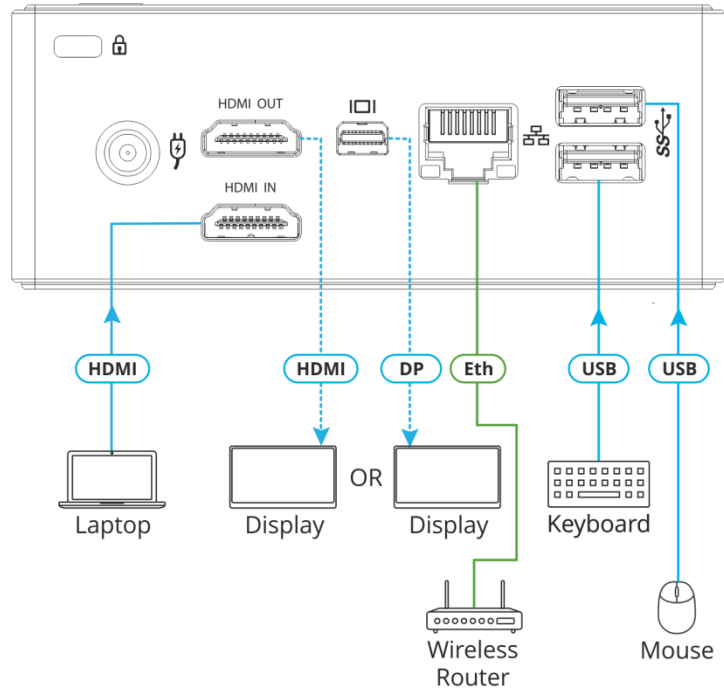

1. Connect the keyboard and mouse.
2. Connect one display (HDMI or Mini DisplayPort). Note: Only one display can be connected at a time.
3. Connect laptop or other HDMI source.
4. Connect a Local Area Network (LAN) cable for connection to your network.  
OR  
Use a wireless router for connecting to the device with Wi-Fi.

## Step 5: Connect the power

Connect the 19V DC power adapter to **VIA Connect PLUS** and plug it into the mains electricity.

### Safety Instructions (DC)




- Caution:** There are no operator serviceable parts inside the unit.  
**Warning:** Use only the Kramer Electronics power adapter that is provided with the unit.  
**Warning:** Disconnect the power and unplug the unit from the wall before installing.  
See [www.KramerAV.com](http://www.KramerAV.com) for updated safety information.

## Step 6: Configure VIA Connect PLUS

A wizard guides you through configuration. If you choose to skip the wizard, follow these steps for configuration:

1. On the **Kramer VIA** dashboard, click **Features > Settings**.
2. Enter the User Name (default = su) and Password (default = supass) and click **Login**.  
The VIA Settings window appears.
3. The VIA Settings tabs are:  
LAN Settings – Configure your network parameters and apply settings (DHCP is enabled by default).  
System Controls – Manage your display and audio settings, run control panel, select your language, etc.  
Wi-Fi (with USB to Wi-Fi dongle connected) – Set up your Wi-Fi adapter as a secondary access point or attach your unit as a client device to your main Wi-Fi network.
4. When you have finished defining settings, click **Reboot** to apply all settings. For more details, see the VIA Connect PLUS User Manual.

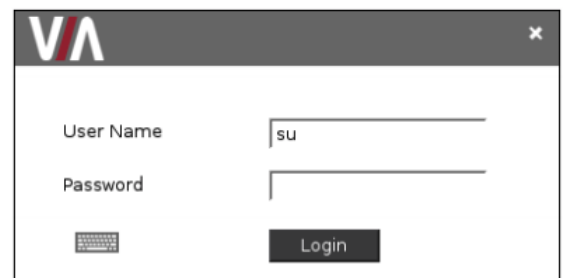



Scan for full manual

## VIA Connect PLUS Quick Start Guide For User

This guide helps you participate in a meeting using **VIA Connect PLUS**.

Go to [www.kramerav.com/downloads/VIA Connect PLUS](http://www.kramerav.com/downloads/VIA Connect PLUS) to download the latest user manual.




### Step 1: Connect your personal device to the proper network

Connect your personal device to the same LAN or Wi-Fi network used by the specific **VIA Connect PLUS** device in your meeting room.

### Step 2: Run or Download the Kramer VIA app

For MAC or PC computer:

1. Enter the Room Name of the **VIA Connect PLUS** device into your computer's browser. The Welcome page of **VIA Connect PLUS** web pages appears.

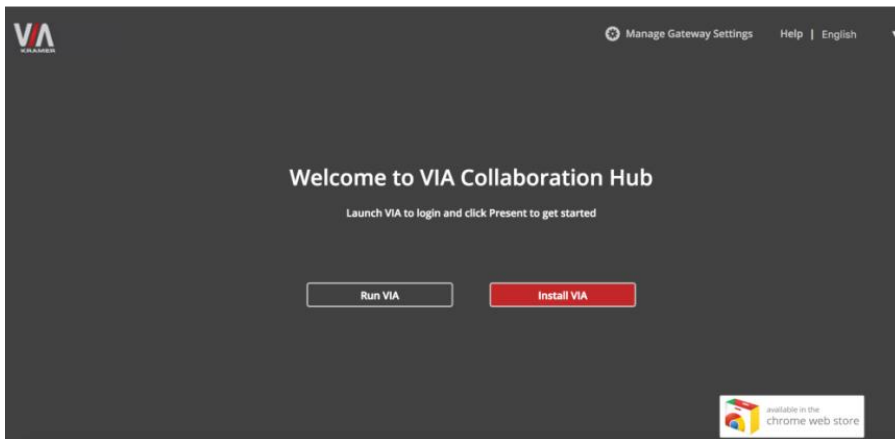

2. Select **Run VIA** to execute the **Kramer VIA** app without downloading it. (Intended for guests who are using VIA only temporarily.)  
OR  
Select **Install VIA** to download the **Kramer VIA** app onto your computer. (Intended for regular users of the VIA.)


For iOS or Android devices:

- Download and install the free **Kramer VIA** app from Apple App Store or Google Play.

### Step 3: Join the meeting

Wirelessly, using the **Kramer VIA** app:

1. In the Room Name field of your Kramer VIA login window, enter the room name as it appears on the main display wallpaper (IP address of the **VIA Connect PLUS** device).
2. In the Nickname field, enter a name for your device. This name appears on the main display when you present content.
3. In the Code field, enter the 4-digit code as it appears in the lower left of the main display (if enabled).
4. Click **Login** to join the meeting.

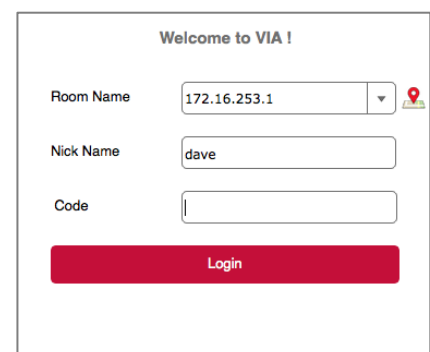

Using the HDMI IN socket:

- Connect your device directly to **VIA Connect PLUS** using an HDMI cable.

## Step 4: Using the VIA dashboard menu



- Click **Features** to access **VIA Connect PLUS** features.
- Click **Present** to present your screen to the meeting participants on the main display.
- Click **Participants** to see who else is connected.

## Step 5: VIA Connect PLUS Features

For a complete, updated list of available features go to: [www.true-collaboration.com/products.html#](http://www.true-collaboration.com/products.html#)



### Wireless Connection

Connect wirelessly with your own device



### Digital Signage (available as an optional license)

Display dynamic content on the main display during meeting downtime



### Powerful Content Security

User authentication, 1024-bit data encryption, dynamic room code



### View Main Display

View the main display on your own device



### Mobile Mirroring

Show any content from your iOS or Android device on the main display



### Streaming Output

Stream all collaboration activity from the main display to any H264 decoder



### Full HD Video Streaming

Share uninterrupted full HD wireless video streaming (up to 1080p60) and photos



### File Storage

Drag and drop files to the Files folder to share instantly with other users



### Integrated YouTube Player

Create playlists, share videos or drag and drop any YouTube clip to your VIA app for seamless video playback



### File Sharing

Share any size file with any number of participants



### Do Not Disturb (DND)

Give the presenter complete control by disabling collaboration features



### Whiteboard

Annotate, illustrate and edit shared documents: touch-screen compatible



### Customizable Features

Enable or disable features based on need



### Chat

Send an instant message to another participant



### VIA Pad Compatible

Touch-and-Present USB device for laptops



### Enable Control

Give a participant control over a presenter's MAC ® or PC laptop



### VIA Site Management (VSM)

Monitor, control and get actionable analytics from all VIA devices on the network; schedule firmware updates, and more



### HDMI Input

Connect any HDMI source (camera, media player, PC) and present it on the main display